


## HC-2518 高速离心机

High speed centrifuge

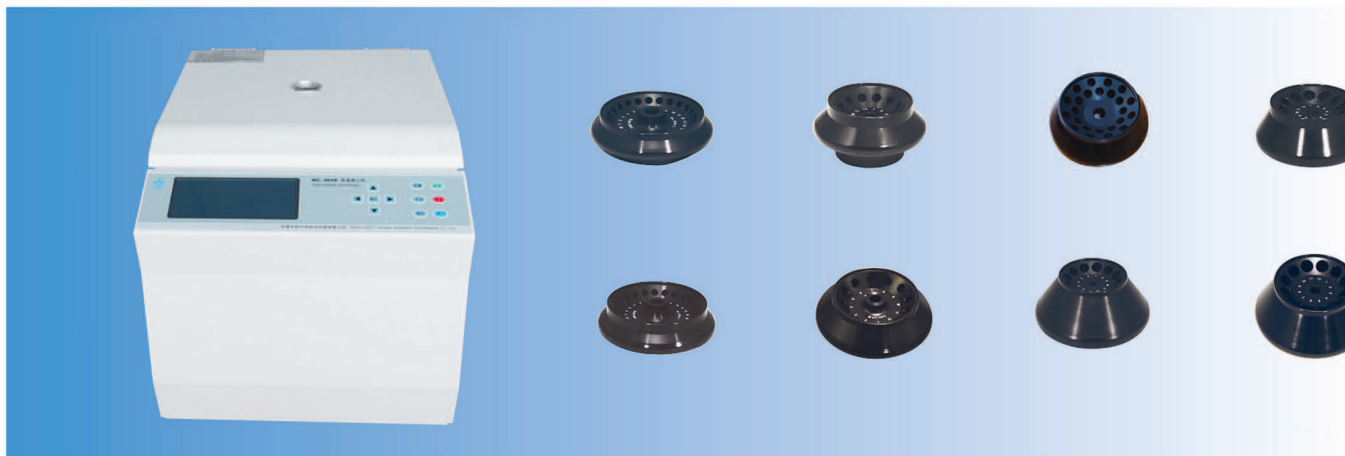

### HC-2518特性:

- ★微电脑控制、LCD液晶显示。
- ★交流变频电机驱动，运行宁静清洁。
- ★提供9种升、降速率选择模式；提供10种工作模式选择，可自由编程、调用。
- ★转速/离心力可相互设定，同步显示。
- ★两种计时模式可选：运行开始计时和到达设定转速开始计时，切换方便。
- ★门盖采用双锁杆设计，磁感应门锁，电动开门，运行更加安全可靠。
- ★运行中可随时更改参数，无需停机。
- ★独特的风冷排风设计，温升低、噪音小。
- ★自动识别转头。
- ★转头使用记忆功能，转头达到使用寿命后机器会报警提示，防止安全隐患。

### Features:

- ★ Microcomputer control, LCD liquid crystal display (LCD).
- ★ Ac frequency conversion motor drive, quiet operation clean.
- ★ Offers nine ascending and descending rate selection mode; Offer ten kinds of working mode selection, can free programming, call.
- ★ Speed/centrifugal force can be set each other, with the screen display.
- ★ Two optional timing mode: run start timing and timing starts to set speed, easy to switch.
- ★ Door with double lock rod design, magnetic locks, electric door, more safety and reliable operation.
- ★ Can change at any time in the operation of the parameters without downtime.
- ★ Unique design of air exhaust temperature, low noise.
- ★ Automatic identification of 9. Turn.
- ★ Turned to use memory function, turned to the service life of the machine will alarm prompt, prevent the security hidden danger.

HC-2518 技术指标 Technical data

最高转速 Max speed	18000rpm
最大相对离心力 Max RCF	23846 × g
转速精度 Speed accuracy	±100rpm
噪音 Noise	≤55dB
定时范围 Timer range	1min~99:99:59 (hh: mm: ss)
温升指标 Temperature indicators	≤8℃ (最高转速运行20分钟)
重量 Weight	29kg
电源 Power Supply	AC 220V 50Hz
功率 Power	250VA
外形尺寸 Dimensions(L × W × H)mm	460 × 315 × 335

HC-2518 可选配的转头

转头型号	最高转速	最大离心力	转头容量
H240.2	18000rpm	18824 × g	24 × 0.2ml
H120.5	18000rpm	16297 × g	12 × 0.5ml
H240.5	18000rpm	23846 × g	24 × 0.5ml
H1202	18000rpm	23198 × g	12 × 1.5ml/2.2ml
H2402	14000rpm	14935 × g	24 × 1.5ml/2.2ml
H1205	16000rpm	17459 × g	12 × 5ml
H1207	14000rpm	16327 × g	12 × 7ml
H1210	12000rpm	13363 × g	12 × 10ml