


KUDOS

功率可调台式超声波清洗器(加热型)
SK2210HP-SK8210HP

- 背景光液晶显示屏
 - 屏上菜单参数选择
 - 1~199分钟定时范围
 - 功率的40~100%，步进1%的连续精细可调
 - 设定温度、槽内水温屏上实时显示
 - 加热无水自动检测报警
 - 20℃~60℃的温度设定范围
 - 超声辅助均匀水温
 - 工作参数断电记忆功能
- Backlight LCD
 - Parameter selection from displayed menu
 - 1-199 minutes timing range
 - 40-100% of maximum power adjustable with subtle 1% step
 - Real-time displays of the set temperature and water temperature in the trough
 - Auto alarm and power-off upon boiling dry
 - temperature set range of 20 ℃-60℃
 - Ultrasonically water temperature harmonization
 - Last parameter memory function

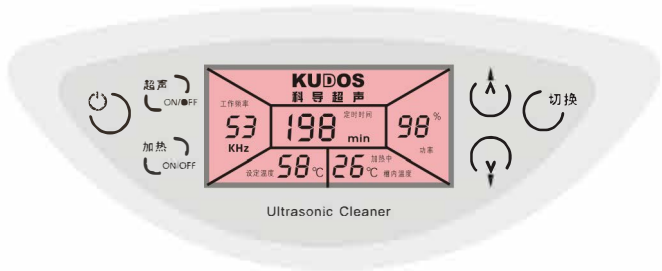

主要技术指标		
工作频率	Operating Frequency	53kHz
数字定时	Digital Timer	1-199min
功率调节	Adjustable Power	功率的40-100%,步进1%的连续精细可调
设温范围	Temperature set range	20℃-60℃
电 源	Power Supply	220V/50Hz
清洗槽材料	Material of tank	304不锈钢 304 Stainless steel

Optional accessories please turn to P37



SK2210HP



SK3210HP



SK3310HP

SK2210HP			
超 声(w)	Ultrasonic	100	
加 热(w)	Heater	75	
容 量(L)	Capacity	3	
槽内尺寸(mm)	Tank Size(L×W×H)	240×140×100	
外形尺寸(mm)	External Size(L×W×H)	270×160×240	
纸箱尺寸(mm)	Carton Size(L×W×H)	367×267×334	
重量(kg)	Net	4	
Weight	Gross	4.8	
标准配置	Accessories	托架 Support rack	
		降音盖 Cover	
价 格(RMB)	Price	3400.00	

SK3210HP			
超 声(w)	Ultrasonic	150	
加 热(w)	Heater	110	
容 量(L)	Capacity	4.5	
槽内尺寸(mm)	Tank Size(L×W×H)	300×150×100	
外形尺寸(mm)	External Size(L×W×H)	330×180×240	
纸箱尺寸(mm)	Carton Size(L×W×H)	405×260×335	
重量(kg)	Net	4.7	
Weight	Gross	5.6	
标准配置	Accessories	托架 Support rack	
		降音盖 Cover	
价 格(RMB)	Price	4600.00	

SK3310HP			
超 声(w)	Ultrasonic	180	
加 热(w)	Heater	150	
容 量(L)	Capacity	6	
槽内尺寸(mm)	Tank Size(L×W×H)	300×150×150	
外形尺寸(mm)	External Size(L×W×H)	330×180×290	
纸箱尺寸(mm)	Carton Size(L×W×H)	427×279×394	
重量(kg)	Net	5.5	
Weight	Gross	6.5	
标准配置	Accessories	托架 Support rack	
		降音盖 Cover	
价 格(RMB)	Price	4900.00	



SK5210HP

SK5210HP			
超 声(w)	Ultrasonic		200
加 热(w)	Heater		270
容 量(L)	Capacity		10
槽内尺寸(mm)	Tank Size(L×W×H)		300×240×150
外形尺寸(mm)	External Size(L×W×H)		360×270×310
纸箱尺寸(mm)	Carton Size(L×W×H)		432×367×397
重量(kg)	Net		7.3
Weight	Gross		8.6
排水阀	Drain Valve		
标准配置	Accessories	托架 Support rack	
		排水软管Soft drainpipe	
		降音盖 Cover	
价 格(RMB)	Price		6500.00



SK2510HP

SK2510HP			
超 声(w)	Ultrasonic		250
加 热(w)	Heater		270
容 量(L)	Capacity		10
槽内尺寸(mm)	Tank Size(L×W×H)		300×240×150
外形尺寸(mm)	External Size(L×W×H)		360×270×310
纸箱尺寸(mm)	Carton Size(L×W×H)		432×367×397
重量(kg)	Net		7.7
Weight	Gross		9
排水阀	Drain Valve		
标准配置	Accessories	托架 Support rack	
		排水软管Soft drainpipe	
		降音盖 Cover	
价 格(RMB)	Price		6700.00



SK6210HP

SK6210HP			
超 声(w)	Ultrasonic		280
加 热(w)	Heater		270
容 量(L)	Capacity		10.5
槽内尺寸(mm)	Tank Size(L×W×H)		500×140×150
外形尺寸(mm)	External Size(L×W×H)		570×160×310
纸箱尺寸(mm)	Carton Size(L×W×H)		660×290×425
重量(kg)	Net		8.4
Weight	Gross		9.9
排水阀	Drain Valve		
标准配置	Accessories	托架 Support rack	
		排水软管Soft drainpipe	
		降音盖 Cover	
价 格(RMB)	Price		7300.00



SK7210HP

SK7210HP			
超 声(w)	Ultrasonic		350
加 热(w)	Heater		390
容 量(L)	Capacity		15
槽内尺寸(mm)	Tank Size(L×W×H)		330×300×150
外形尺寸(mm)	External Size(L×W×H)		390×330×310
纸箱尺寸(mm)	Carton Size(L×W×H)		457×459×412
重量(kg)	Net		9.5
Weight	Gross		11
排水阀	Drain Valve		
标准配置	Accessories	托架 Support rack	
		排水软管Soft drainpipe	
		降音盖 Cover	
价 格(RMB)	Price		8500.00



SK8210HP

SK8210HP			
超 声(w)	Ultrasonic		500
加 热(w)	Heater		520
容 量(L)	Capacity		22.5
槽内尺寸(mm)	Tank Size(L×W×H)		500×300×150
外形尺寸(mm)	External Size(L×W×H)		570×330×330
纸箱尺寸(mm)	Carton Size(L×W×H)		662×431×428
重量(kg)	Net		12.8
Weight	Gross		14.6
排水阀	Drain Valve		
标准配置	Accessories	托架 Support rack	
		排水软管Soft drainpipe	
		降音盖 Cover	
价 格(RMB)	Price		10200.00

★合理地选用配件能使仪器达到最佳效果(见P37)

小贴士

理想的清洗液温度应控制在55~60℃，当清洗器温度上升至65~80℃时，超声波振子的内阻将增加10~20%，而功率将递减24~34%。
Optimal cleaning temperature is 55℃ to 60℃. When temperature rises to 65℃ to 80℃, internal resistance of ultrasonic vibrator will rise by 10% to 20% and power will be 24% to 34% lower.